


MANUAL OF LED T5 TUBE LIGHT

(T5 Series-With Bracket)

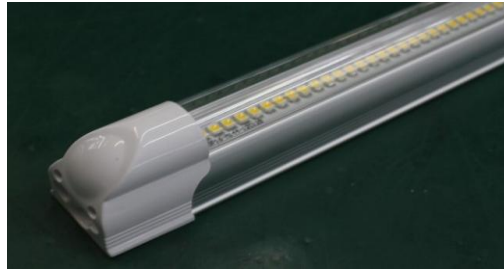

I. Main Features

1. Energy saving up to 60% in electricity consumption compared with traditional fluorescent tube light.
2. Environment friendly, no UV or infrared radiation, mercury free.
3. Instant on/off without delay, even light distribution, no color degradation, flicker-free.
4. Three types of PC covers available – Frosted, Stripe and Clear covers.
5. Options for T5 tube with bracket (integral structure) or without bracket..
6. Easy installation, ideal for direct replacement of T5 fluorescent tubes.
7. Maintenance free, extra long lifespan of over 50,000 hours.
8. Suitable for applications in office, supermarket, hotel, school, hospital and warehouse.

II. Technical Specifications

Tube Length.	600mm / 2 Ft			1200mm / 4 Ft			1500mm / 5 Ft		
Model No.	TA-TL0600-09T5I			TA-TL1200-18T5I			TA-TL1500-22T5II		
Order No.	TA-TL0600 -09T5I-WW	TA-TL0600 -09T5I-PW	TA-TL0600 -09T5I-CW	TA-TL1200 -18T5I-WW	TA-TL1200 -18T5I-PW	TA-TL1200 -18T5I-CW	TA-TL1500 -22T5I-WW	TA-TL1500 -22T5I-PW	TA-TL1500 -22T5I-CW
Tube Size	Φ15×600mm			Φ15×1200mm			Φ15×1500mm		
Power	9W			18W			22W		
Input Power	90-265VAC 50/60Hz								
Light Source	144pcs(Samsung 3528)			288pcs (Samsung 3528)			324pcs (Samsung 3528)		
CCT	2700-3700K	4000-5300K	5500-6700K	2700-3700K	4000-5300K	5500-6700K	2700-3700K	4000-5300K	5500-6700K
Luminous Flux	720-810 lm			1440-1620 lm			1760-1980 lm		
CRI (Ra)	≥70								
PF	≥0.9								
Mount Base	G5								
Beam Angle	160°								
Working Temperature	-20℃~50℃(10%~90%RH)								
Housing Material	Aluminum & PC Cover								
LED Lifespan	≥50,000 hrs								
Net Weight	170g			330g			410g		
Package	25pcs/Carton Volume: 610*160*160mm			25pcs/Carton Volume: 1210*160*160mm			25pcs/Carton Volume: 1520*160*160mm		

Single-End-Power-Input LED Tube Light

單端通電燈管佈線圖


LED Tube Light Wiring Diagram:
 LED 燈管佈線圖:

Certificate




III. Installation Instruction

AC 85-265V Power Input



Installation instructions: 安裝指南:

- 1) Turn off the electricity supply before installation .
 安裝前請斷開燈座上的電源，嚴禁帶電操作。
- 2) For refitting old fluorescent lamp with a **single-end-power-input** LED tube, please remove the traditional tube
 當用單端通電LED燈管替代時，取下螢光燈管

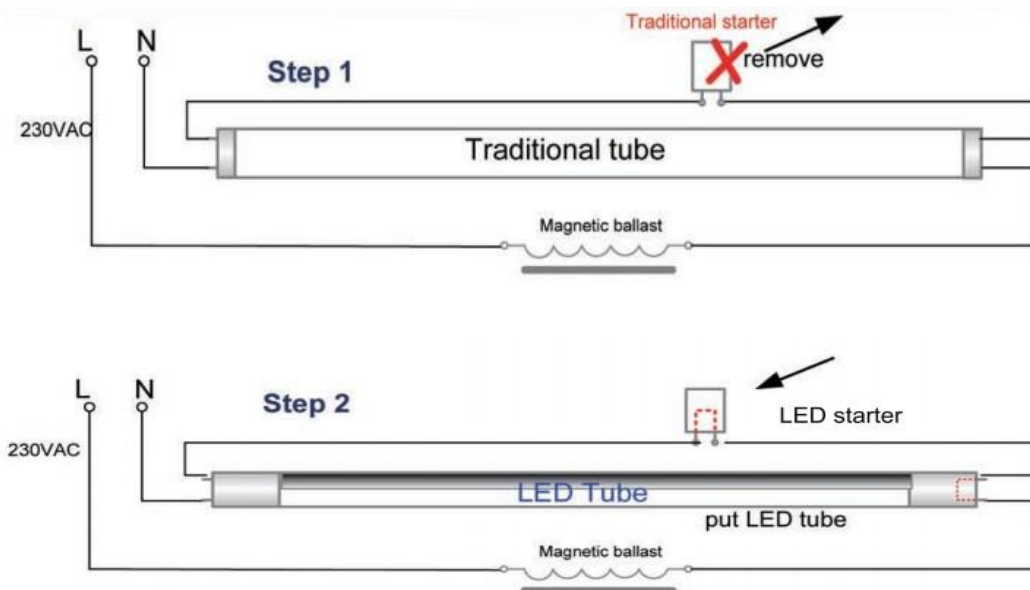

- 3) For diagram with magnetic ballast & starter, please replace the old starter with LED starter first. Now you can put on

the LED tube and turn it on.


對於使用電感鎮流器的線路,如上圖所示:取下啟輝器後裝上 LED 啟輝器(連接作用),LED 燈管可安裝在原来的 G13 燈座上直接使用

LED Tube Light Wiring Diagram:

LED 燈管佈線圖:

Two-End-Power-Input LED Tube Light

雙端通電燈管佈線圖




Installation instructions:


安裝指南:

- 1) Turn off the electricity supply before installation .
安裝前請斷開燈座上的電源,嚴禁帶電操作。檢查原來螢光燈燈座線路是否符合圖 A1,B1 請按照插圖所示步驟調整。
- 2) For refitting old fluorescent lamp, with a **two-end-power-input** LED tube, please re-connect your wire as the following diagram.


當用雙端通電 LED 燈管替代時,請按照下面 A2 或 B2 電路重新接線

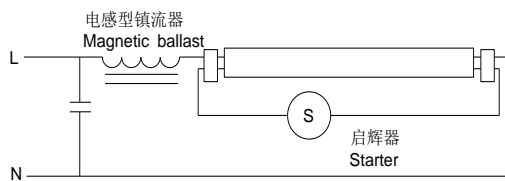


A1

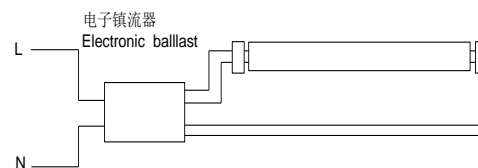

B1

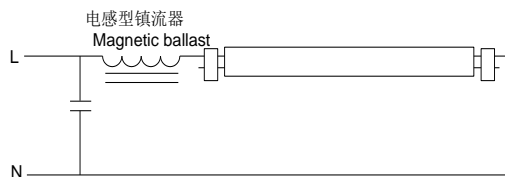

A2

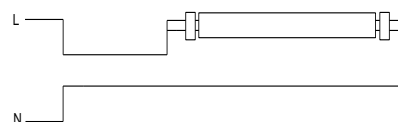

B2

- 3) For diagram A1 loop with magnetic ballast & starter, after removing the starter, LED tube can be installed directly into the G13 base. Then LED tube light is ready to work. And the loop has been changed from A1 to A2.

對於使用電感鎮流器的線路,如 A1 所示: 取下啟輝器後 LED 燈管可安裝在原來的 G13 燈座上直接使用。此時線路改變為 A2。

- 4) You can just keep the magnetic ballast as it was. However, it'll consumer some power. For saving energy, it's still suggested to cut it out if your labor cost is not so high.

電感鎮流器可以保留不動。但它會仍然耗電,如重新接線人工成本不高,建議剪除鎮流器,將其兩端的線接通即可。

- 5) For diagram B1 loop with electronic ballast , please remove the electronic ballast first. Then connect L and N to the two sockets of the G13 base separately. Now your LED tube light is ready to be turned on. And the loop has been changed into the one showed in diagram B2.

對於使用電子流器的線路,如 B1 所示,需移除鎮流器,然後將兩條輸入電線分別接在 G13 燈座兩端上,此時線路改變為 B2。

IV. Applications



Application Instance



T&A - Smart LED Lighting Solution